




K2097.060
K2097.120

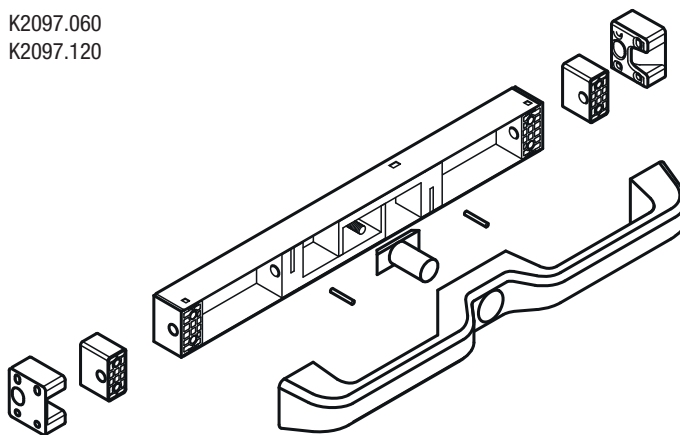


K2097.91

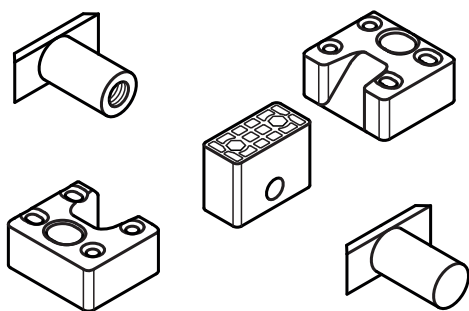


K2097.900500
K2097.900750
K2097.910500
K2097.910750

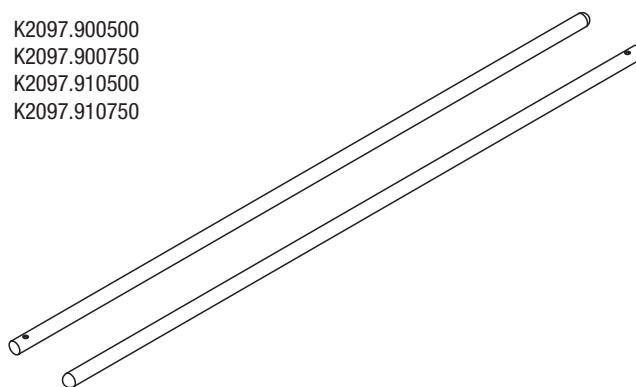

K2097.60 + K2097.900500 или K2097.910500
K2097.120 + K2097.900750 или K2097.910750

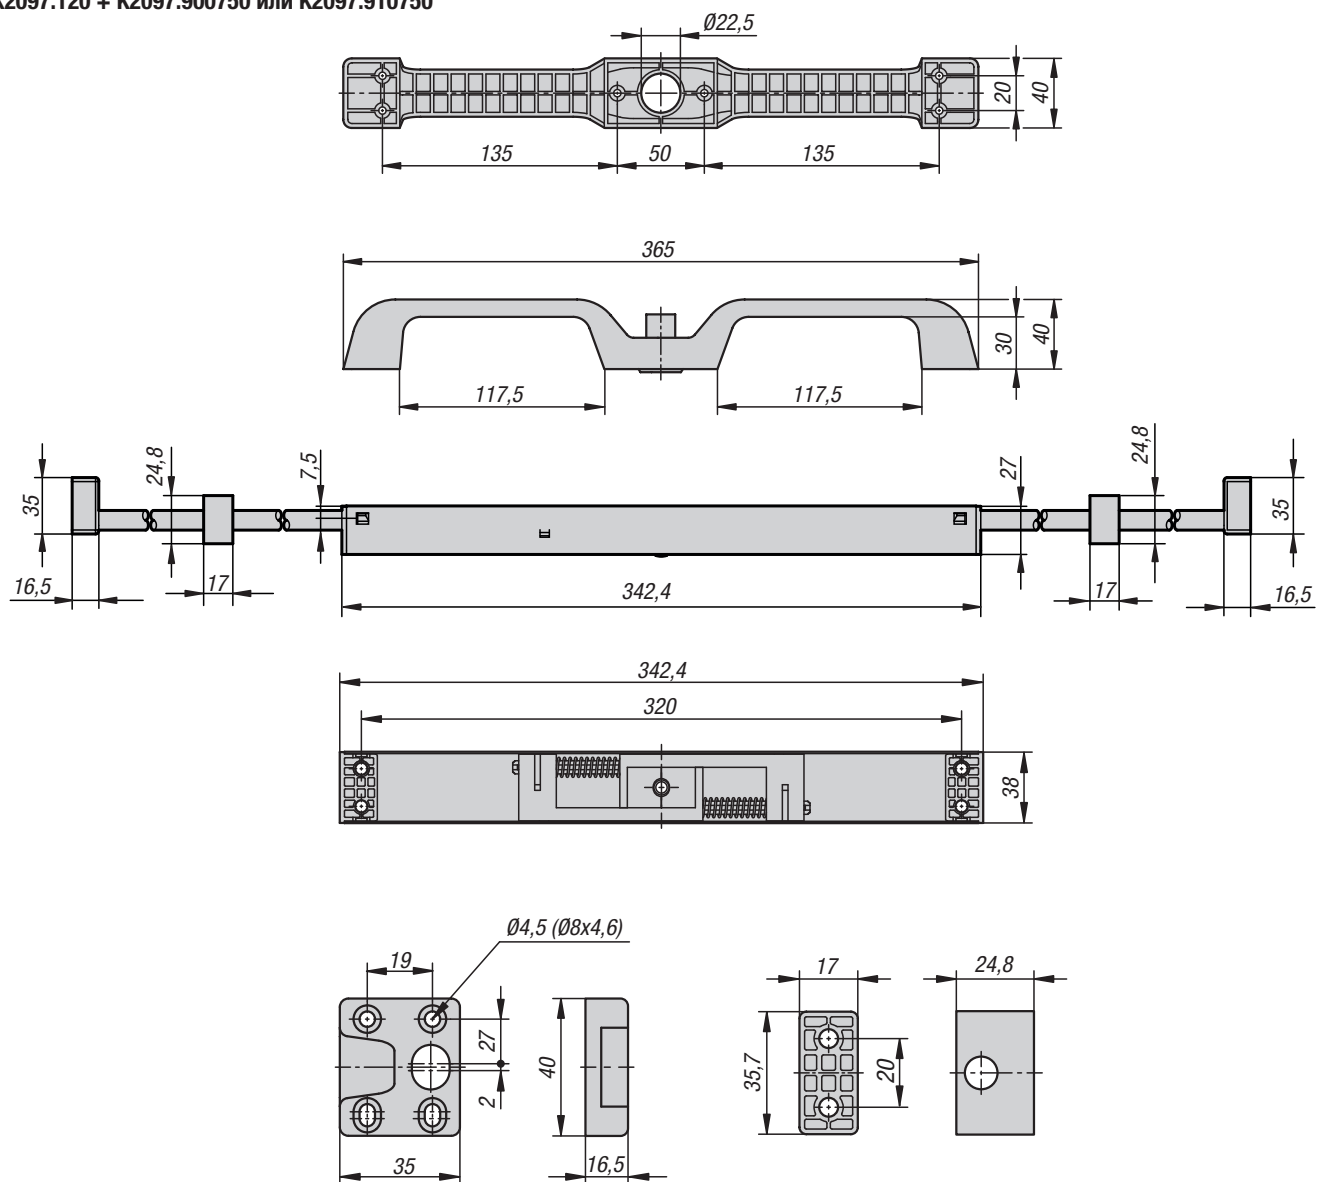


K2097.60 + K2097.900500
или K2097.910500 + K2097.91
K2097.120 + K2097.900750
или K2097.910750



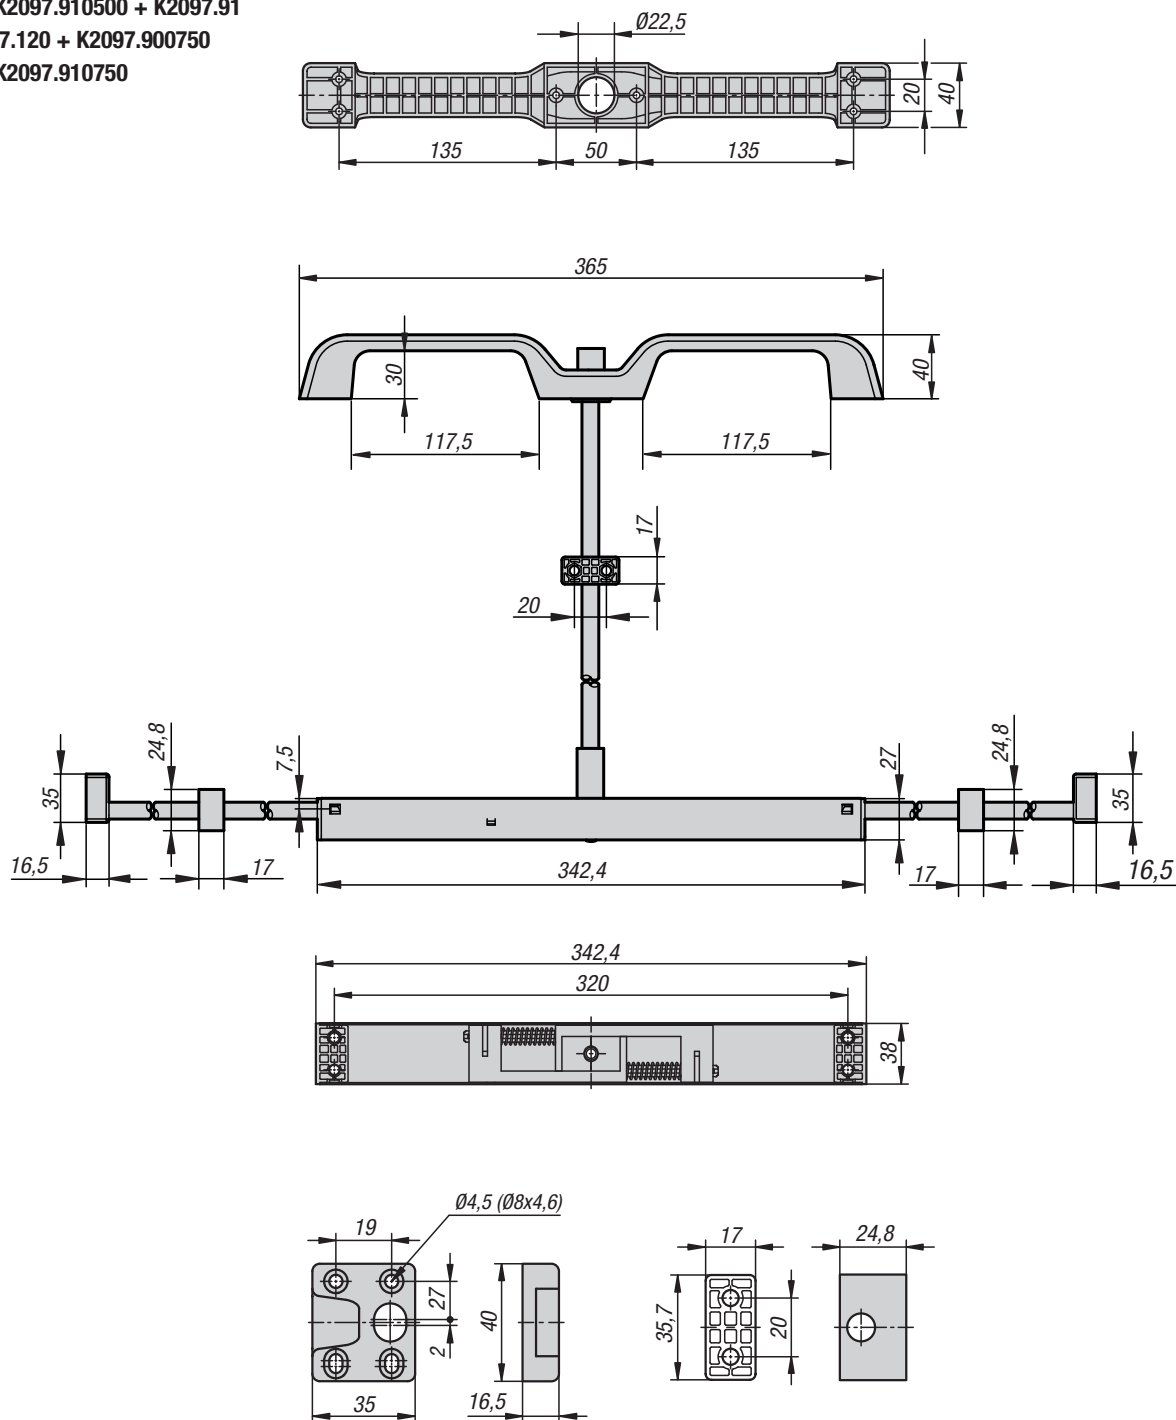




Крепление и фиксация



Блокировка в открытом положении не может использоваться для шин со сверхвыдвижением (выдвижение более 100 %).

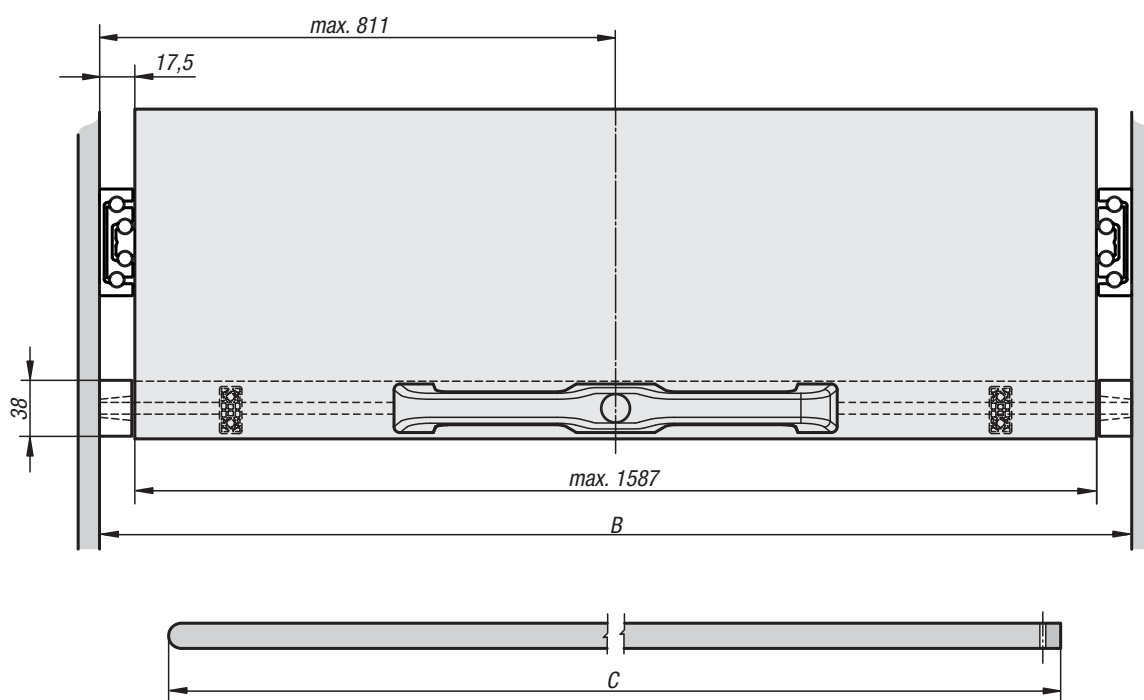

 $C = (B - 122,3) / 2$
 $C < 500$
 $C > 500$

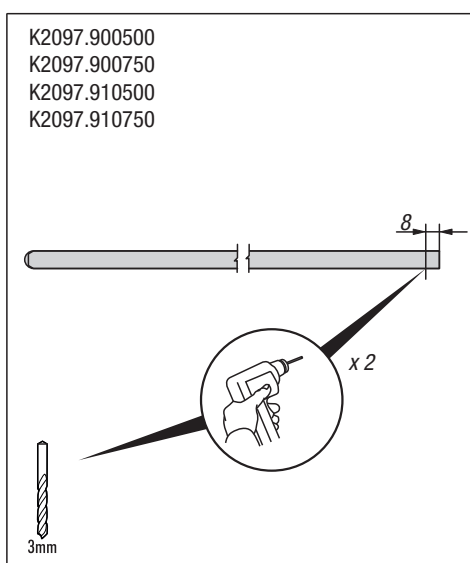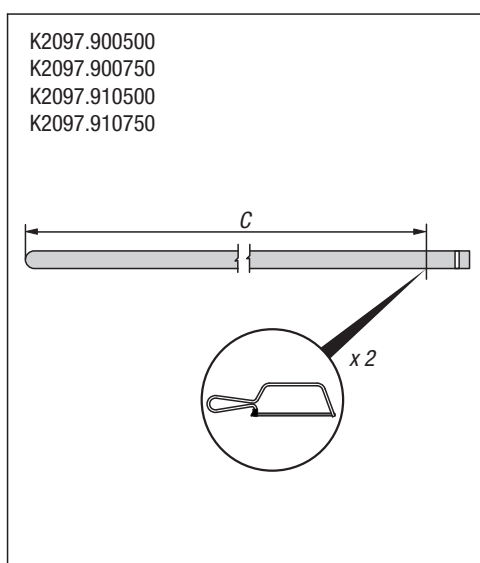

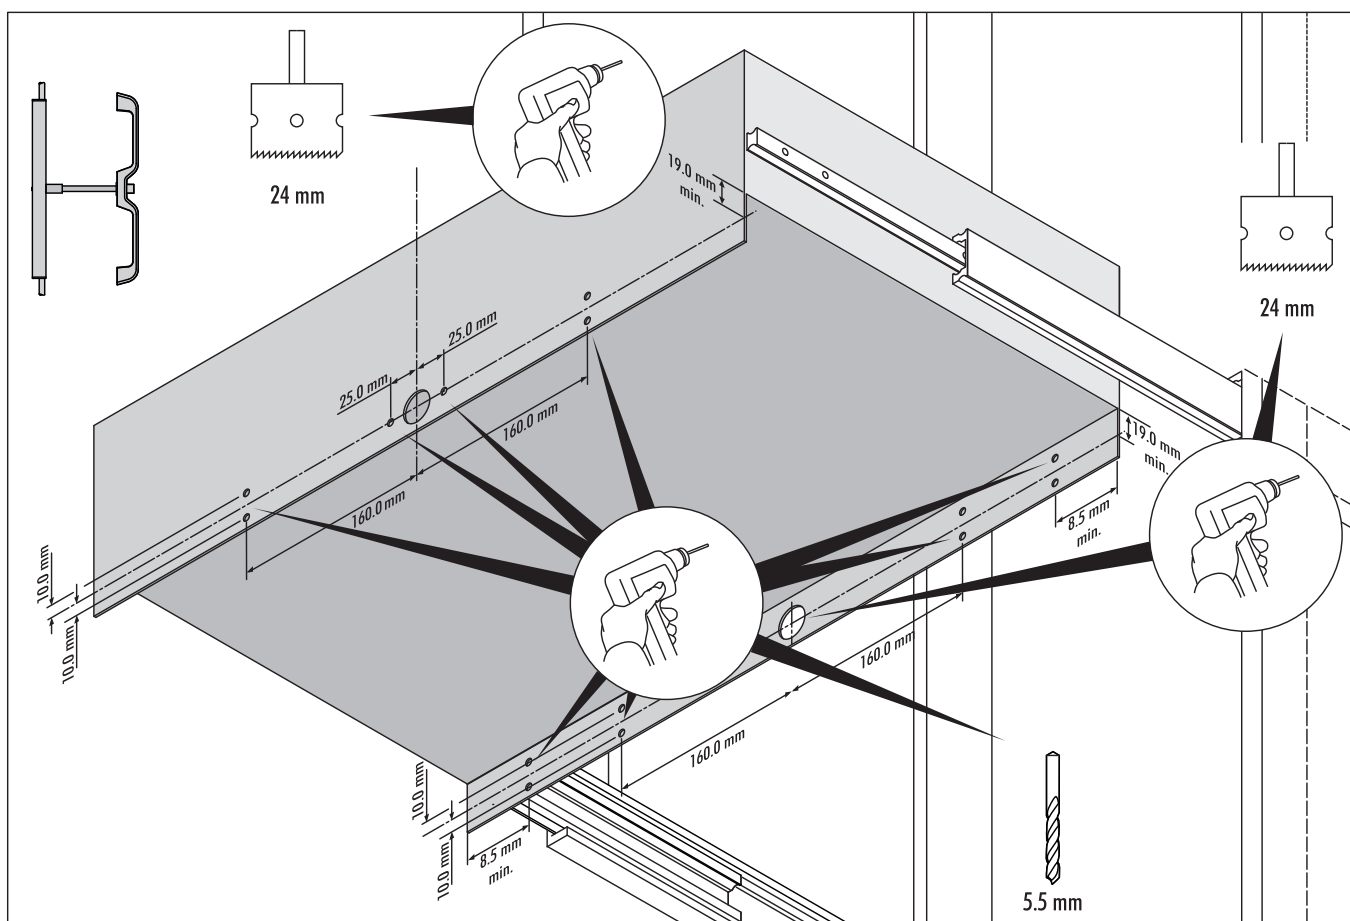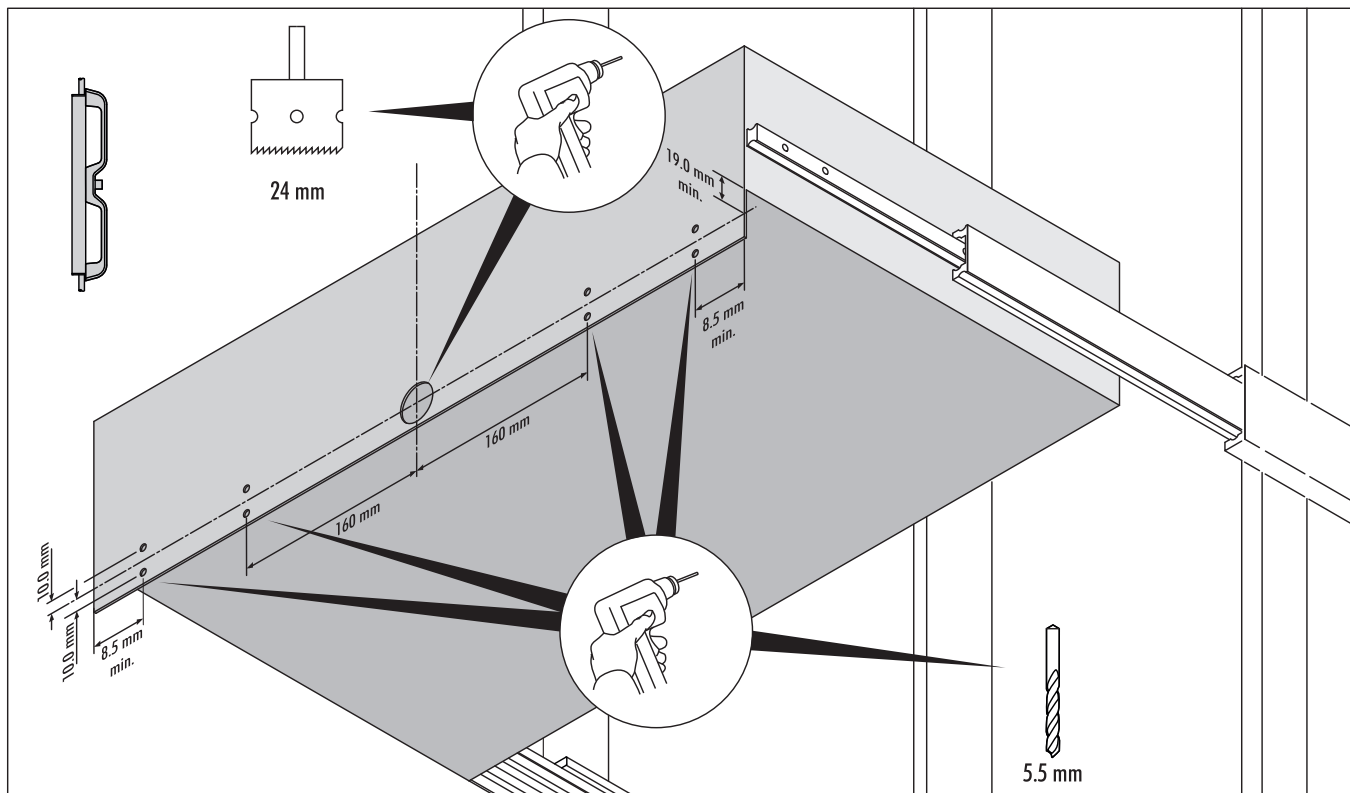

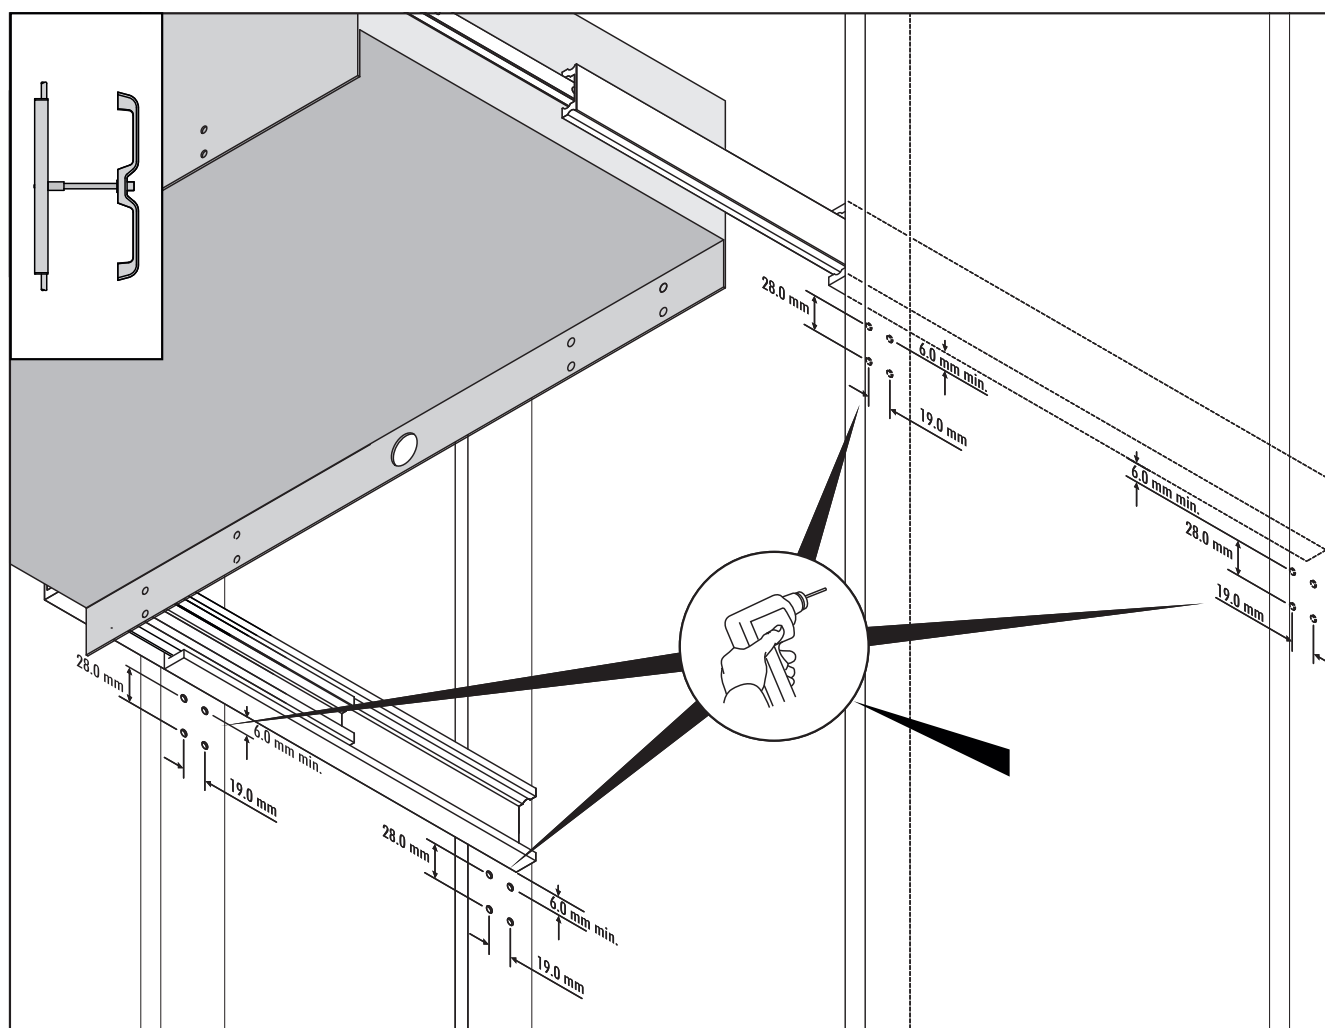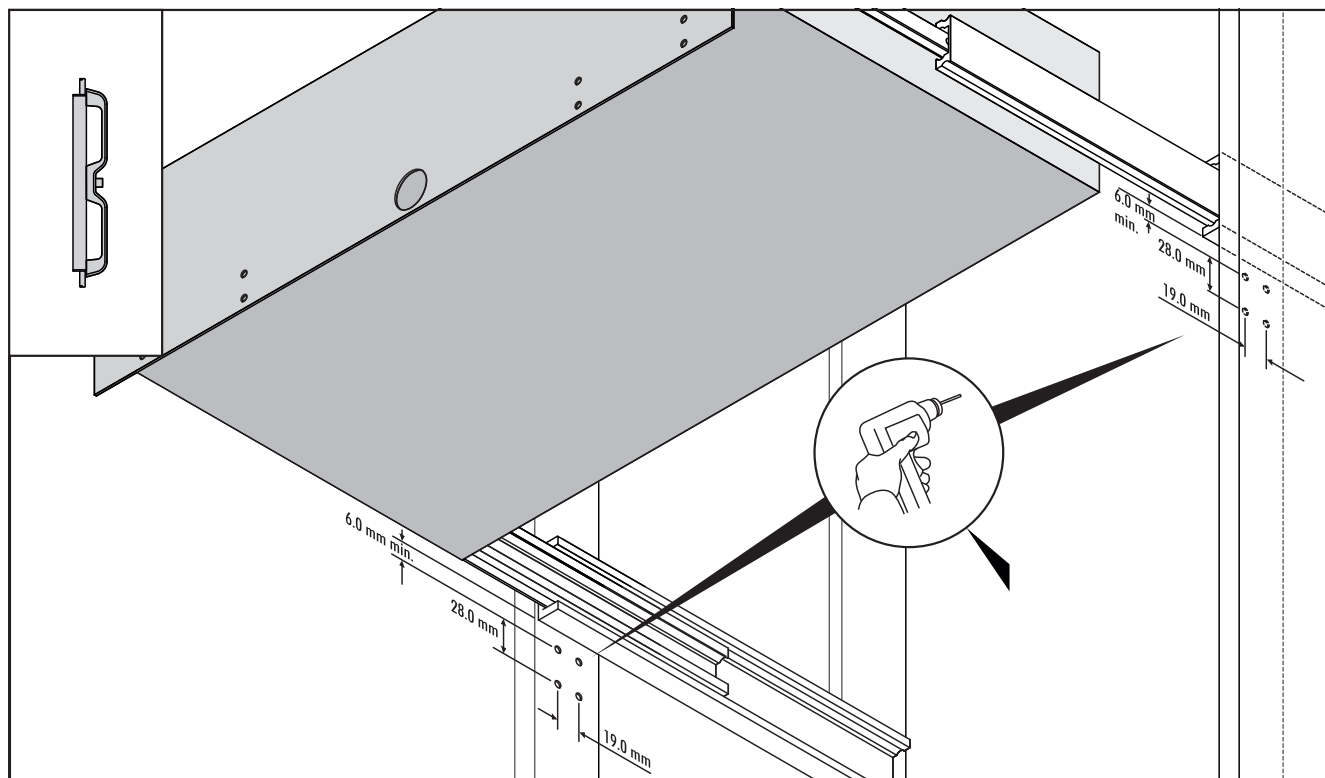

Сверление и крепление с учетом конкретной ситуации

