


## Telescopic slides



## Telescopic slides, steel

for slot mounting, partial extension, load capacity up to 10 kg

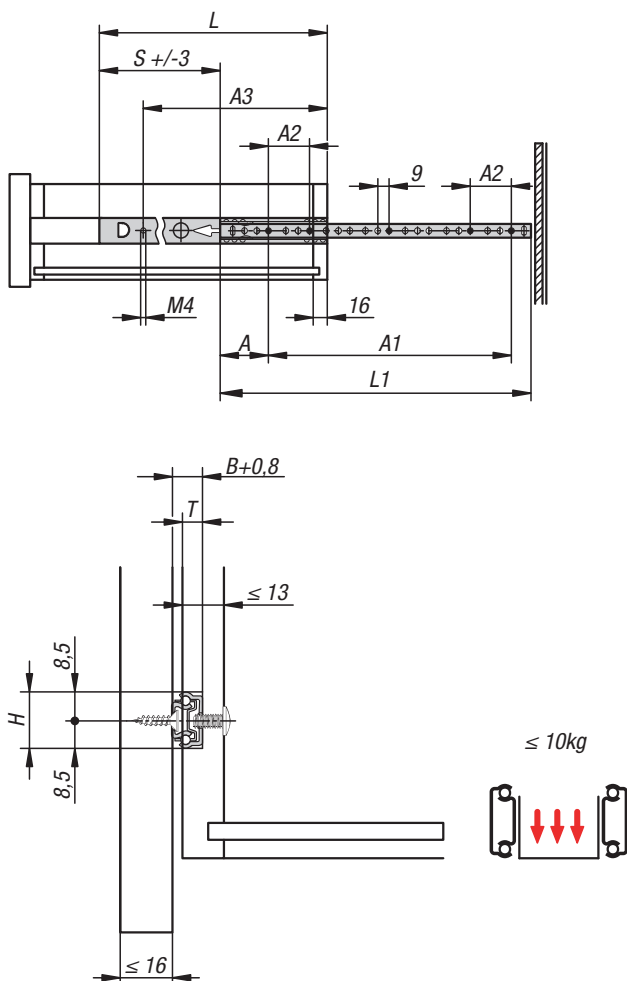

**Material:**  
Steel slides.  
Plastic ball cages.  
C-steel balls.

**Version:**  
Slides electro zinc-plated.  
Balls hardened.

**Sample order:**  
K1566.0164

**Note for ordering:**  
Supplied in pairs

**Note:**  
On telescopic slides with partial extension, the travel is less than the installed length. These are a low-cost solution for guiding drawers or similar items with little friction and high lateral stability. Interlocking in closed position. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

**Attention:**  
The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.




### KIPP Steel telescopic slides, for slot mounting, partial extension, load capacity up to 10 kg

| Order No.  | A  | A2 | A3  | B  | H  | L   | L1  | Travel S | T = slot depth | Loading per pair kg | Drawer depth from - to |
|------------|----|----|-----|----|----|-----|-----|----------|----------------|---------------------|------------------------|
| K1566.0133 | 37 | 32 | 101 | 10 | 17 | 133 | 150 | 85       | 6-7            | 10                  | 155 - 210              |
| K1566.0164 | 37 | 32 | 132 | 10 | 17 | 164 | 182 | 104      | 6-7            | 10                  | 185 - 260              |
| K1566.0185 | 37 | 32 | 153 | 10 | 17 | 185 | 182 | 125      | 6-7            | 10                  | 185 - 305              |
| K1566.0210 | 37 | 32 | 178 | 10 | 17 | 210 | 214 | 138      | 6-7            | 10                  | 220 - 340              |
| K1566.0217 | 37 | 32 | 185 | 10 | 17 | 217 | 214 | 145      | 6-7            | 10                  | 220 - 355              |
| K1566.0241 | 37 | 32 | 209 | 10 | 17 | 241 | 246 | 157      | 6-7            | 10                  | 250 - 390              |
| K1566.0249 | 37 | 32 | 217 | 10 | 17 | 249 | 246 | 165      | 6-7            | 10                  | 250 - 410              |
| K1566.0430 | 37 | 32 | 398 | 10 | 17 | 430 | 278 | 328      | 6-7            | 10                  | 430                    |
| K1566.0450 | 37 | 32 | 418 | 10 | 17 | 450 | 278 | 348      | 6-7            | 10                  | 450                    |
| K1566.0480 | 37 | 32 | 448 | 10 | 17 | 480 | 310 | 366      | 6-7            | 10                  | 480                    |
| K1566.0500 | 37 | 32 | 468 | 10 | 17 | 500 | 310 | 368      | 6-7            | 10                  | 500                    |
| K1566.0550 | 37 | 32 | 518 | 10 | 17 | 550 | 342 | 424      | 6-7            | 10                  | 550                    |

## Telescopic slides, steel

for slot mounting, partial extension, load capacity up to 12 kg

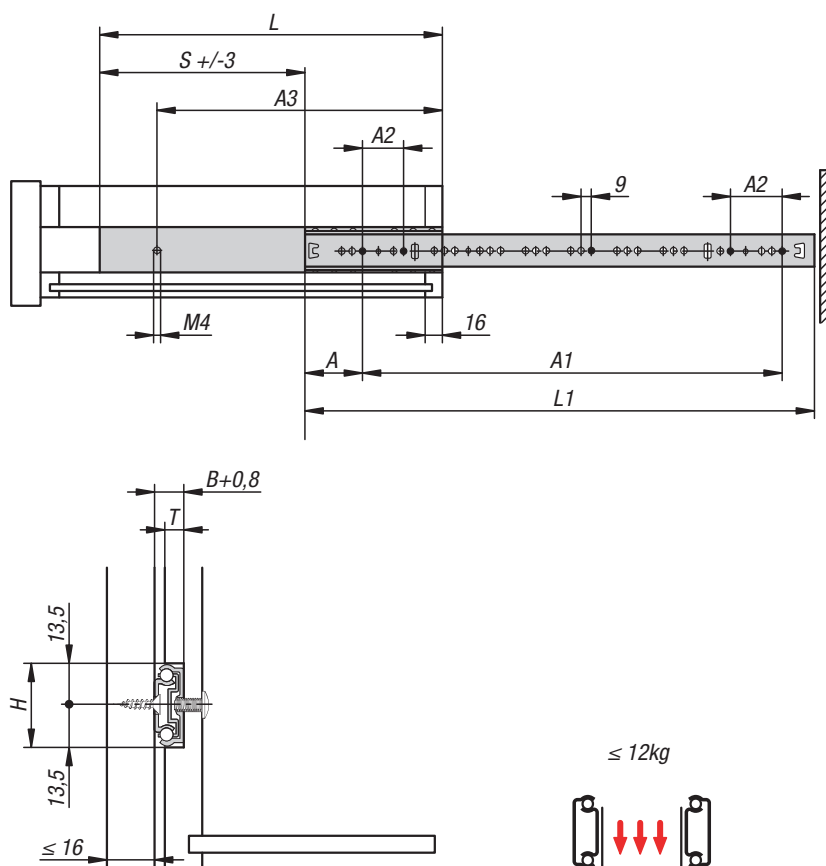

### Material:

Steel slides.  
Plastic ball cages.  
C-steel balls.

### Version:

Slides electro zinc-plated.  
Balls hardened.

### Sample order:

K1567.0328

### Note for ordering:

Supplied in pairs

### Note:

On slot-mounted telescopic slides with partial extension, the travel is shorter than the installed length. These are a low-cost solution for guiding drawers or similar items with little friction and high lateral stability. Interlocking in closed position. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.




## KIPP Steel telescopic slides, for slot mounting, partial extension, load capacity up to 12 kg

| Order No.  | A  | A1  | A2 | A3  | B  | H  | L   | L1  | Travel S | T = slot depth | Loading per pair kg | Drawer depth from - to |
|------------|----|-----|----|-----|----|----|-----|-----|----------|----------------|---------------------|------------------------|
| K1567.0222 | 37 | 160 | 32 | 190 | 10 | 27 | 222 | 214 | 150      | 6-7            | 12                  | 230 - 350              |
| K1567.0328 | 37 | 288 | 32 | 296 | 10 | 27 | 328 | 342 | 232      | 6-7            | 12                  | 350 - 550              |

# Telescopic slides, steel

for slot mounting, over-extension, load capacity up to 20 kg

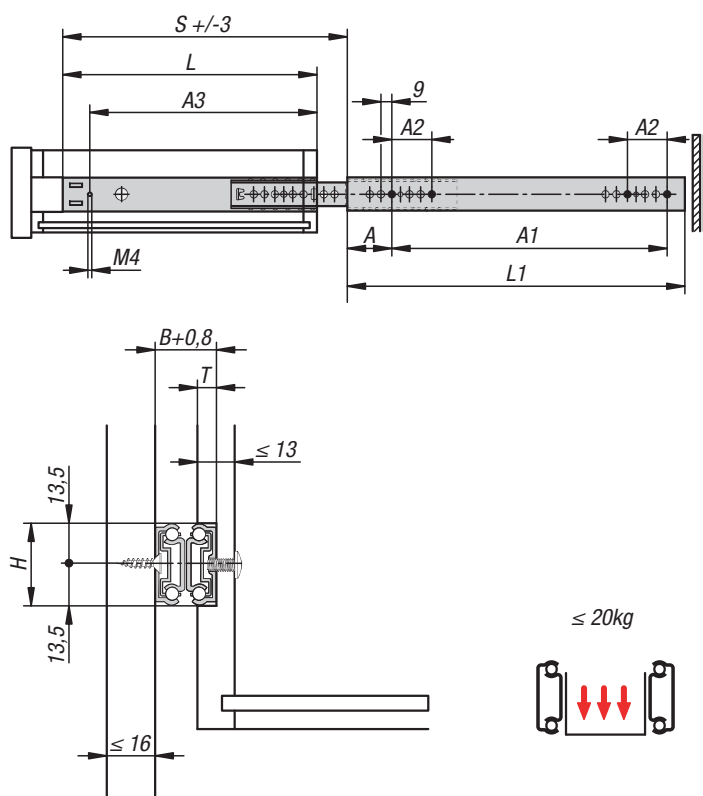

## Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

## Version:

Slides electro zinc-plated.  
Balls hardened.

## Sample order:

K1568.0310

## Note for ordering:

Supplied in pairs

## Note:

On slot-mounted telescopic slides with partial extension, the travel is shorter than the installed length. These are a low-cost solution for guiding drawers or similar items with little friction and high lateral stability. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

## Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.




## KIPP Steel telescopic slides for slot mounting, over-extension, load capacity up to 20 kg

| Order No.  | A  | A1  | A2 | A3  | B    | H  | L   | L1  | Travel S | T = slot depth | Loading per pair kg | Drawer depth from - to |
|------------|----|-----|----|-----|------|----|-----|-----|----------|----------------|---------------------|------------------------|
| K1568.0197 | 36 | 192 | 32 | 165 | 19,4 | 27 | 197 | 246 | 274      | 6-7            | 20                  | 200 - 310              |
| K1568.0303 | 36 | 256 | 32 | 271 | 19,4 | 27 | 303 | 310 | 334      | 6-7            | 20                  | 310 - 450              |
| K1568.0328 | 36 | 256 | 32 | 296 | 19,4 | 27 | 328 | 310 | 365      | 6-7            | 20                  | 450 - 550              |

## Telescopic slides, steel

for side mounting, full extension, load capacity up to 30 kg

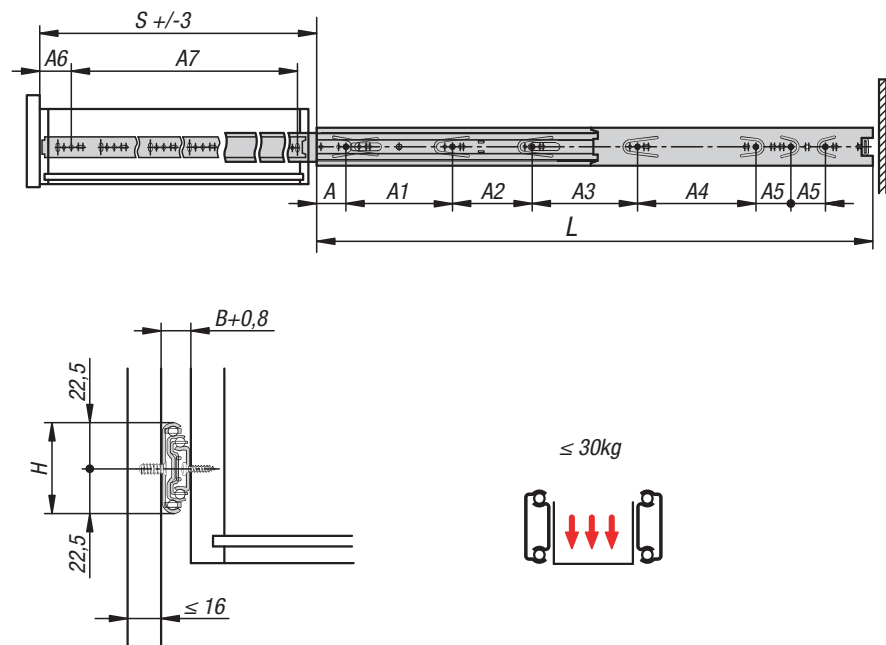

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1569.0300

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.





### KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 30 kg

| Order No.  | A  | A1  | A2 | A3  | A4 | A5 | A6 | A7  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|----|----|----|-----|------|----|-----|----------|---------------------|
| K1569.0250 | 35 | 128 | -  | -   | -  | -  | 35 | 192 | 12,7 | 45 | 250 | 250      | 30                  |
| K1569.0300 | 35 | 128 | 96 | -   | -  | -  | 35 | 242 | 12,7 | 45 | 300 | 300      | 30                  |
| K1569.0350 | 35 | 128 | 96 | -   | -  | -  | 35 | 292 | 12,7 | 45 | 350 | 350      | 30                  |
| K1569.0400 | 35 | 128 | 96 | 96  | -  | -  | 35 | 342 | 12,7 | 45 | 400 | 400      | 30                  |
| K1569.0450 | 35 | 128 | 96 | 128 | -  | -  | 35 | 392 | 12,7 | 45 | 450 | 450      | 30                  |
| K1569.0500 | 35 | 128 | 96 | 128 | 64 | -  | 35 | 442 | 12,7 | 45 | 500 | 500      | 30                  |
| K1569.0550 | 35 | 128 | 96 | 128 | 64 | 32 | 35 | 492 | 12,7 | 45 | 550 | 550      | 30                  |

# Telescopic slides, steel

for side mounting, full extension, load capacity up to 35 kg

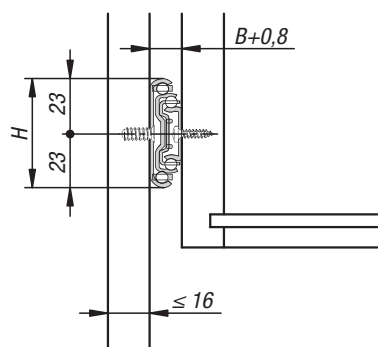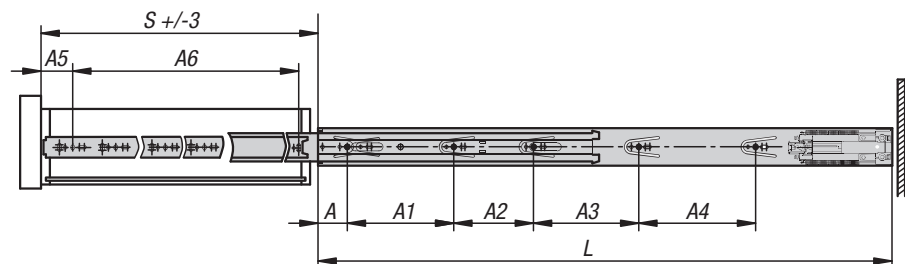

≤ 35kg



## Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

## Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

## Sample order:

K1571.0350

## Note for ordering:

Supplied in pairs

## Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide. When closing, the movement of the telescopic slides is dampened by the soft closing feature and they move automatically into the end position.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacities specified refer to the maximum value for 50,000 cycles.

## Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 2.






## KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 35 kg

| Order No.  | A  | A1  | A2 | A3  | A4  | A5 | A6  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|-----|----|-----|------|----|-----|----------|---------------------|
| K1571.0300 | 35 | 128 | -  | -   | -   | 35 | 171 | 12,7 | 46 | 300 | 300      | 35                  |
| K1571.0350 | 35 | 128 | 64 | -   | -   | 35 | 220 | 12,7 | 46 | 350 | 350      | 35                  |
| K1571.0400 | 35 | 128 | 64 | -   | -   | 35 | 254 | 12,7 | 46 | 400 | 400      | 35                  |
| K1571.0450 | 35 | 128 | 96 | -   | -   | 35 | 294 | 12,7 | 46 | 450 | 450      | 35                  |
| K1571.0500 | 35 | 128 | 96 | 64  | -   | 35 | 344 | 12,7 | 46 | 500 | 500      | 35                  |
| K1571.0550 | 35 | 128 | 96 | 128 | -   | 35 | 394 | 12,7 | 46 | 550 | 550      | 35                  |
| K1571.0600 | 35 | 128 | 96 | 160 | -   | 35 | 444 | 12,7 | 46 | 600 | 600      | 35                  |
| K1571.0650 | 35 | 128 | 96 | 128 | 96  | 35 | 494 | 12,7 | 46 | 650 | 650      | 35                  |
| K1571.0700 | 35 | 128 | 96 | 128 | 128 | 35 | 544 | 12,7 | 46 | 700 | 700      | 35                  |

## Telescopic slides, steel

for side mounting, full extension, load capacity up to 35 kg

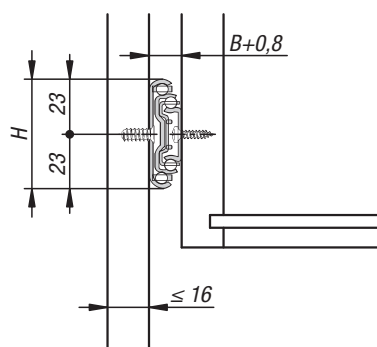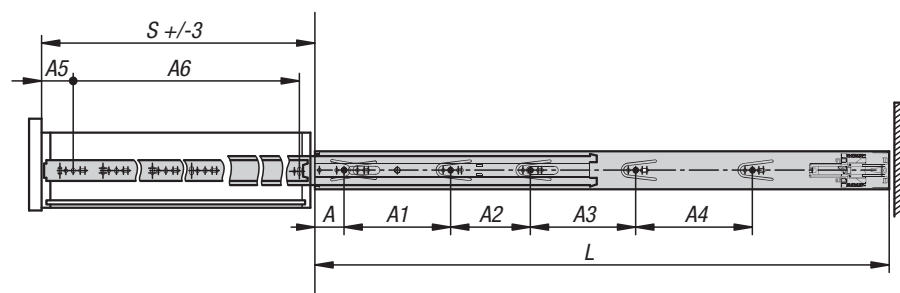

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1572.0350

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

When slight pressure is applied, the telescopic slides move out by themselves, almost silently.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacities specified refer to the maximum value for 50,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 2.





### KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 35 kg

| Order No.  | A  | A1  | A2  | A3  | A4  | A5 | A6  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|-----|-----|-----|----|-----|------|----|-----|----------|---------------------|
| K1572.0300 | 35 | 128 | -   | -   | -   | 35 | 192 | 12,7 | 46 | 300 | 300      | 35                  |
| K1572.0350 | 35 | 128 | 64  | -   | -   | 35 | 242 | 12,7 | 46 | 350 | 350      | 35                  |
| K1572.0400 | 35 | 128 | 96  | -   | -   | 35 | 292 | 12,7 | 46 | 400 | 400      | 35                  |
| K1572.0450 | 35 | 128 | 160 | -   | -   | 35 | 342 | 12,7 | 46 | 450 | 450      | 35                  |
| K1572.0500 | 35 | 128 | 96  | 96  | -   | 35 | 392 | 12,7 | 46 | 500 | 500      | 35                  |
| K1572.0550 | 35 | 128 | 96  | 128 | -   | 35 | 442 | 12,7 | 46 | 550 | 550      | 35                  |
| K1572.0600 | 35 | 128 | 96  | 128 | 96  | 35 | 492 | 12,7 | 46 | 600 | 600      | 35                  |
| K1572.0650 | 35 | 128 | 96  | 128 | 128 | 35 | 542 | 12,7 | 46 | 650 | 650      | 35                  |
| K1572.0700 | 35 | 128 | 96  | 128 | 192 | 35 | 592 | 12,7 | 46 | 700 | 700      | 35                  |

## Telescopic slides, steel

for surface mounting, full extension, load capacity up to 35 kg

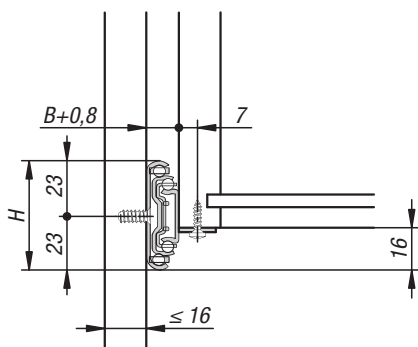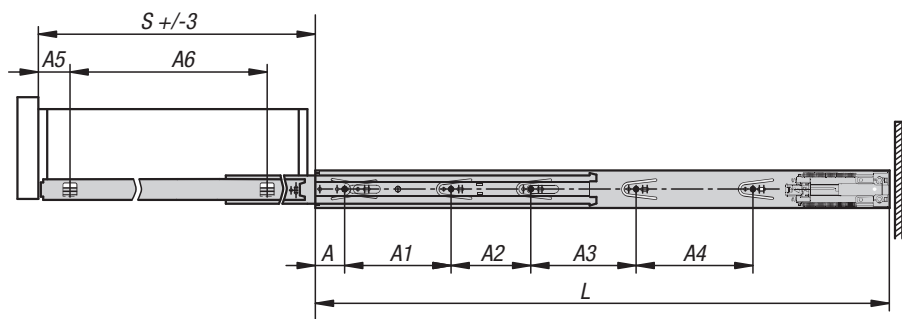

≤ 35kg



### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1573.0350

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide. When closing, the movement of the telescopic slides is damped by the soft closing feature and they move automatically into the end position.

The side screw fittings on the inner rail are replaced by support brackets.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load-bearing capacities specified refer to the maximum value for 50,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 2.






## KIPP Steel telescopic slides for surface mounting, full extension, load capacity up to 35 kg

| Order No.  | A  | A1  | A2 | A3  | A4  | A5 | A6  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|-----|----|-----|------|----|-----|----------|---------------------|
| K1573.0300 | 35 | 128 | -  | -   | -   | 35 | 230 | 12,7 | 46 | 300 | 300      | 35                  |
| K1573.0350 | 35 | 128 | 64 | -   | -   | 35 | 280 | 12,7 | 46 | 350 | 350      | 35                  |
| K1573.0400 | 35 | 128 | 64 | -   | -   | 35 | 315 | 12,7 | 46 | 400 | 400      | 35                  |
| K1573.0450 | 35 | 128 | 96 | -   | -   | 35 | 365 | 12,7 | 46 | 450 | 450      | 35                  |
| K1573.0500 | 35 | 128 | 96 | 64  | -   | 35 | 415 | 12,7 | 46 | 500 | 500      | 35                  |
| K1573.0550 | 35 | 128 | 96 | 128 | -   | 35 | 465 | 12,7 | 46 | 550 | 550      | 35                  |
| K1573.0600 | 35 | 128 | 96 | 160 | -   | 35 | 515 | 12,7 | 46 | 600 | 600      | 35                  |
| K1573.0650 | 35 | 128 | 96 | 128 | 96  | 35 | 565 | 12,7 | 46 | 650 | 650      | 35                  |
| K1573.0690 | 35 | 128 | 96 | 128 | 128 | 35 | 615 | 12,7 | 46 | 690 | 690      | 35                  |



## Telescopic slides, steel

for surface mounting, full extension, load capacity up to 35 kg

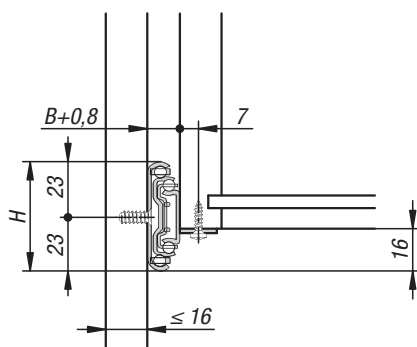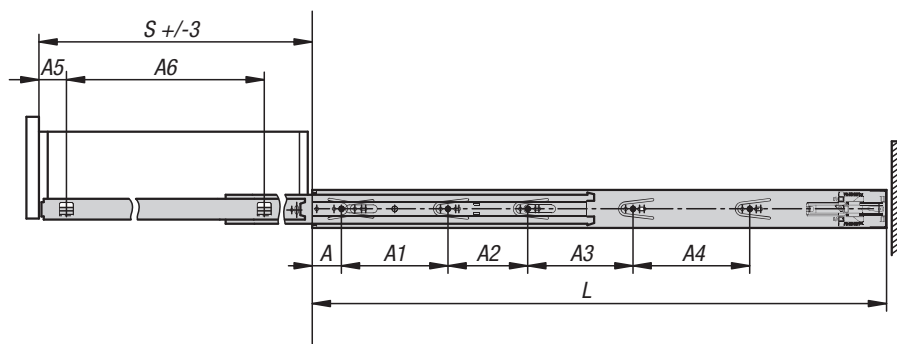

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1574.0350

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

When slight pressure is applied, the telescopic slides move out by themselves, almost silently.

The side screw fittings on the inner rail are replaced by support brackets.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacities specified refer to the maximum value for 50,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 2.






## KIPP Steel telescopic slides for surface mounting, full extension, load capacity up to 35 kg

| Order No.  | A  | A1  | A2  | A3  | A4  | A5 | A6  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|-----|-----|-----|----|-----|------|----|-----|----------|---------------------|
| K1574.0300 | 35 | 128 | -   | -   | -   | 35 | 192 | 12,7 | 46 | 300 | 300      | 35                  |
| K1574.0350 | 35 | 128 | 64  | -   | -   | 35 | 242 | 12,7 | 46 | 350 | 350      | 35                  |
| K1574.0400 | 35 | 128 | 96  | -   | -   | 35 | 292 | 12,7 | 46 | 400 | 400      | 35                  |
| K1574.0450 | 35 | 128 | 160 | -   | -   | 35 | 342 | 12,7 | 46 | 450 | 450      | 35                  |
| K1574.0500 | 35 | 128 | 96  | 96  | -   | 35 | 392 | 12,7 | 46 | 500 | 500      | 35                  |
| K1574.0550 | 35 | 128 | 96  | 128 | -   | 35 | 442 | 12,7 | 46 | 550 | 550      | 35                  |
| K1574.0600 | 35 | 128 | 96  | 128 | 96  | 35 | 492 | 12,7 | 46 | 600 | 600      | 35                  |
| K1574.0650 | 35 | 128 | 96  | 128 | 128 | 35 | 542 | 12,7 | 46 | 650 | 650      | 35                  |
| K1574.0700 | 35 | 128 | 96  | 128 | 192 | 35 | 592 | 12,7 | 46 | 700 | 700      | 35                  |

## Telescopic slides, steel

for side mounting, full extension, load capacity up to 40 kg

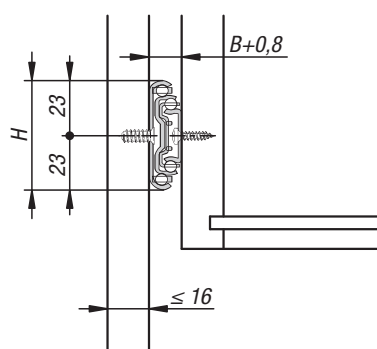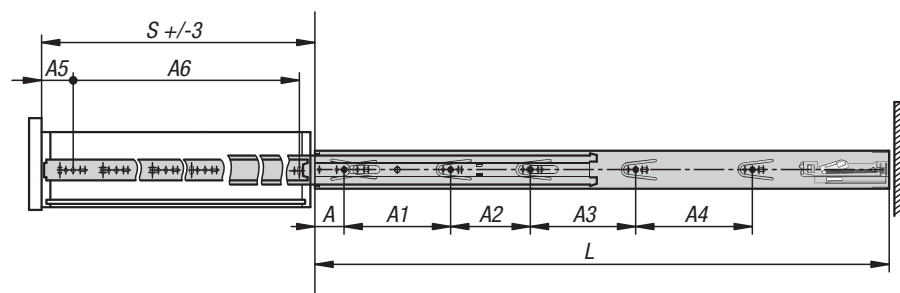

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1575.0350

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide. When pushed back, the guide rails are automatically drawn to the end position by the integrated self-closing mechanism.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.






## KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 40 kg

| Order No.  | A  | A1  | A2 | A3  | A4  | A5 | A6  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|-----|----|-----|------|----|-----|----------|---------------------|
| K1575.0300 | 35 | 128 | -  | -   | -   | 35 | 208 | 12,7 | 46 | 270 | 270      | 40                  |
| K1575.0350 | 35 | 128 | -  | -   | -   | 35 | 240 | 12,7 | 46 | 350 | 350      | 40                  |
| K1575.0400 | 35 | 128 | 96 | -   | -   | 35 | 288 | 12,7 | 46 | 400 | 400      | 40                  |
| K1575.0450 | 35 | 128 | 96 | -   | -   | 35 | 320 | 12,7 | 46 | 450 | 450      | 40                  |
| K1575.0500 | 35 | 128 | 96 | 128 | -   | 35 | 352 | 12,7 | 46 | 500 | 500      | 40                  |
| K1575.0550 | 35 | 128 | 96 | 128 | -   | 35 | 416 | 12,7 | 46 | 550 | 550      | 40                  |
| K1575.0600 | 35 | 128 | 96 | 128 | 96  | 35 | 416 | 12,7 | 46 | 600 | 600      | 40                  |
| K1575.0650 | 35 | 128 | 96 | 128 | 128 | 35 | 544 | 12,7 | 46 | 650 | 650      | 40                  |
| K1575.0700 | 35 | 128 | 96 | 128 | 192 | 35 | 544 | 12,7 | 46 | 700 | 700      | 40                  |

## Telescopic slides, steel

for side mounting, full extension, load capacity up to 45 kg

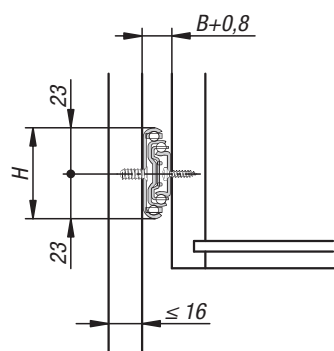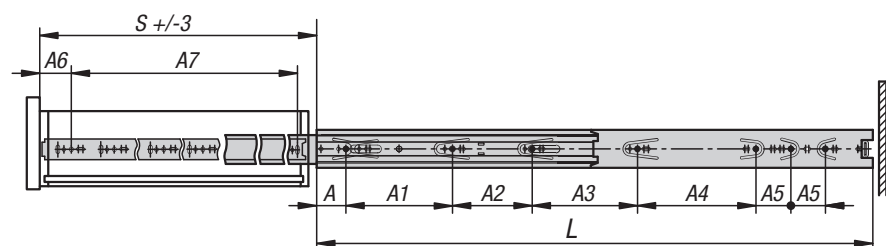

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1577.0300

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.






## KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 45 kg

| Order No.  | A  | A1  | A2 | A3  | A4  | A5 | A6 | A7  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|-----|----|----|-----|------|----|-----|----------|---------------------|
| K1577.0250 | 35 | 128 | -  | -   | -   | -  | 35 | 192 | 12,7 | 46 | 250 | 250      | 45                  |
| K1577.0300 | 35 | 128 | 96 | -   | -   | -  | 35 | 242 | 12,7 | 46 | 300 | 300      | 45                  |
| K1577.0350 | 35 | 128 | 96 | -   | -   | -  | 35 | 292 | 12,7 | 46 | 350 | 350      | 45                  |
| K1577.0400 | 35 | 128 | 96 | 96  | -   | -  | 35 | 342 | 12,7 | 46 | 400 | 400      | 45                  |
| K1577.0450 | 35 | 128 | 96 | 128 | -   | -  | 35 | 392 | 12,7 | 46 | 450 | 450      | 45                  |
| K1577.0500 | 35 | 128 | 96 | 128 | 64  | -  | 35 | 442 | 12,7 | 46 | 500 | 500      | 45                  |
| K1577.0550 | 35 | 128 | 96 | 128 | 64  | 32 | 35 | 492 | 12,7 | 46 | 550 | 550      | 45                  |
| K1577.0600 | 35 | 128 | 96 | 128 | 96  | 32 | 35 | 542 | 12,7 | 46 | 600 | 600      | 45                  |
| K1577.0650 | 35 | 128 | 96 | 128 | 160 | 32 | 35 | 592 | 12,7 | 46 | 650 | 650      | 45                  |
| K1577.0700 | 35 | 128 | 96 | 128 | 192 | 32 | 35 | 642 | 12,7 | 46 | 700 | 700      | 45                  |

## Telescopic slides, steel

for side mounting, over-extension, load capacity up to 60 kg

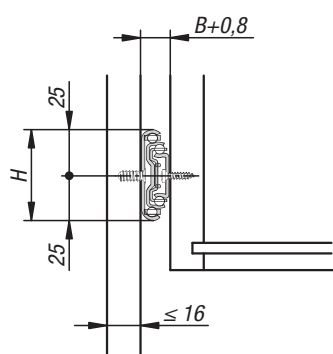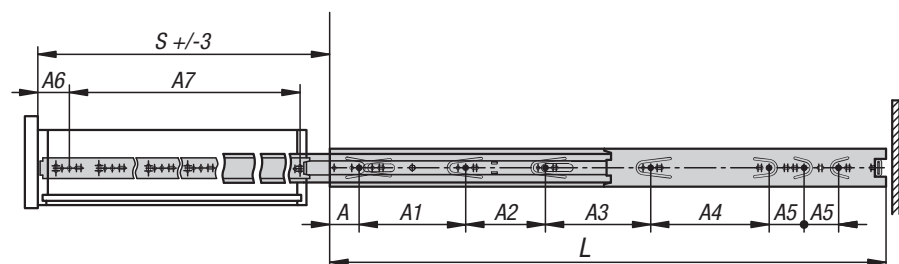

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1578.0300

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with over-extension, the travel is greater than the installed length. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.





## KIPP Steel telescopic slides for side mounting, over-extension, load capacity up to 60 kg

| Order No.  | A  | A1  | A2 | A3  | A4  | A5 | A6 | A7  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|-----|----|----|-----|------|----|-----|----------|---------------------|
| K1578.0250 | 35 | 128 | -  | -   | -   | -  | 35 | 192 | 12,7 | 50 | 250 | 288      | 60                  |
| K1578.0300 | 35 | 128 | 96 | -   | -   | -  | 35 | 242 | 12,7 | 50 | 300 | 338      | 60                  |
| K1578.0350 | 35 | 128 | 96 | -   | -   | -  | 35 | 292 | 12,7 | 50 | 350 | 388      | 60                  |
| K1578.0400 | 35 | 128 | 96 | 96  | -   | -  | 35 | 342 | 12,7 | 50 | 400 | 438      | 60                  |
| K1578.0450 | 35 | 128 | 96 | 128 | -   | -  | 35 | 392 | 12,7 | 50 | 450 | 488      | 60                  |
| K1578.0500 | 35 | 128 | 96 | 128 | 64  | -  | 35 | 442 | 12,7 | 50 | 500 | 538      | 60                  |
| K1578.0550 | 35 | 128 | 96 | 128 | 64  | 32 | 35 | 492 | 12,7 | 50 | 550 | 588      | 60                  |
| K1578.0600 | 35 | 128 | 96 | 128 | 96  | 32 | 35 | 542 | 12,7 | 50 | 600 | 638      | 60                  |
| K1578.0650 | 35 | 128 | 96 | 128 | 160 | 32 | 35 | 592 | 12,7 | 50 | 650 | 688      | 60                  |
| K1578.0700 | 35 | 128 | 96 | 128 | 192 | 32 | 35 | 642 | 12,7 | 50 | 700 | 738      | 60                  |

## Telescopic slides, steel

for surface mounting, over-extension, load capacity up to 60 kg

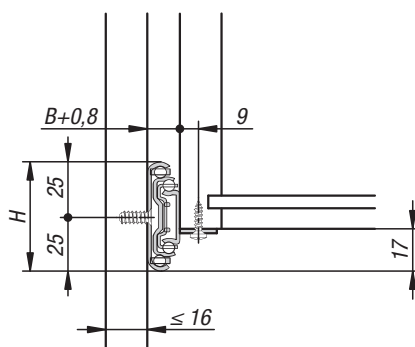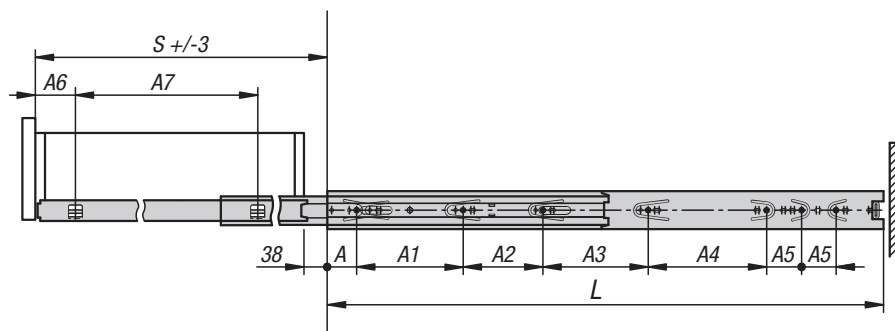

≤ 60kg



### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1579.0400

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with over-extension, the travel is greater than the installed length. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.




## KIPP Steel telescopic slides for surface mounting, over-extension, load capacity up to 60 kg

| Order No.  | A  | A1  | A2 | A3  | A4 | A5 | A6 | A7  | B    | H  | L   | Travel S | Loading per pair kg |
|------------|----|-----|----|-----|----|----|----|-----|------|----|-----|----------|---------------------|
| K1579.0350 | 35 | 128 | 96 | -   | -  | -  | 35 | 283 | 12,7 | 50 | 350 | 388      | 60                  |
| K1579.0400 | 35 | 128 | 96 | 96  | -  | -  | 35 | 333 | 12,7 | 50 | 400 | 438      | 60                  |
| K1579.0450 | 35 | 128 | 96 | 128 | -  | -  | 35 | 383 | 12,7 | 50 | 450 | 488      | 60                  |
| K1579.0500 | 35 | 128 | 96 | 128 | 64 | -  | 35 | 433 | 12,7 | 50 | 500 | 538      | 60                  |
| K1579.0550 | 35 | 128 | 96 | 128 | 64 | 32 | 35 | 483 | 12,7 | 50 | 550 | 588      | 60                  |
| K1579.0600 | 35 | 128 | 96 | 128 | 96 | 32 | 35 | 533 | 12,7 | 50 | 600 | 638      | 60                  |

## Telescopic slides, steel

for side mounting, over-extension, load capacity up to 90 kg

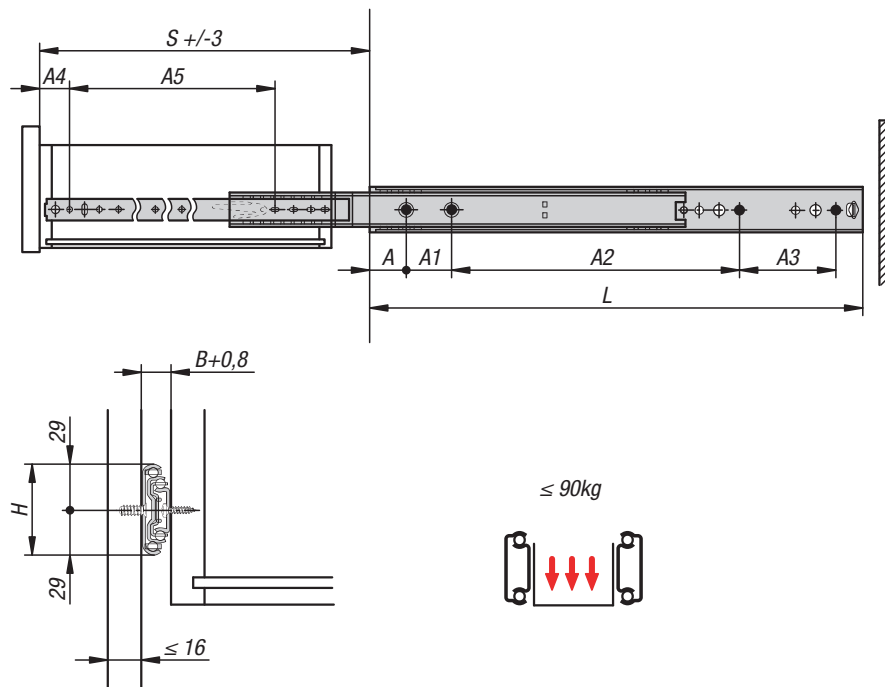

### Material:

Slides steel.  
Ball cages steel and plastic.  
Balls C-steel.

### Version:

Slides electro zinc-plated and trivalent blue passivated.  
Balls hardened.

### Sample order:

K1580.0350

### Note for ordering:

Supplied in pairs

### Note:

On telescopic slides with over-extension, the travel is greater than the installed length. Interlocking in closed position. When the release lever is actuated, the drawer can be taken out easily and separated from the guide. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 20,000 cycles.

### Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 1.




## KIPP Steel telescopic slides for side mounting, over-extension, load capacity up to 90 kg

| Order No.  | A     | A1 | A2  | A3  | A4    | A5    | B  | H  | L   | Travel S | Loading per pair kg |
|------------|-------|----|-----|-----|-------|-------|----|----|-----|----------|---------------------|
| K1580.0300 | 31,75 | 57 | 122 | -   | 31,75 | 233,5 | 19 | 58 | 300 | 338      | 90                  |
| K1580.0350 | 31,75 | 57 | 172 | -   | 31,75 | 283,5 | 19 | 58 | 350 | 388      | 90                  |
| K1580.0400 | 31,75 | 57 | 111 | 111 | 31,75 | 333,5 | 19 | 58 | 400 | 438      | 90                  |
| K1580.0450 | 31,75 | 57 | 136 | 136 | 31,75 | 383,5 | 19 | 58 | 450 | 488      | 90                  |
| K1580.0500 | 31,75 | 57 | 161 | 161 | 31,75 | 433,5 | 19 | 58 | 500 | 538      | 90                  |
| K1580.0550 | 31,75 | 57 | 186 | 186 | 31,75 | 483,5 | 19 | 58 | 550 | 588      | 90                  |
| K1580.0600 | 31,75 | 57 | 211 | 211 | 31,75 | 533,5 | 19 | 58 | 600 | 638      | 90                  |
| K1580.0650 | 31,75 | 57 | 236 | 236 | 31,75 | 583,5 | 19 | 58 | 650 | 688      | 90                  |
| K1580.0700 | 31,75 | 57 | 261 | 261 | 31,75 | 633,5 | 19 | 58 | 700 | 738      | 90                  |

# Telescopic slides, steel

for side mounting, full extension, load capacity up to 136 kg

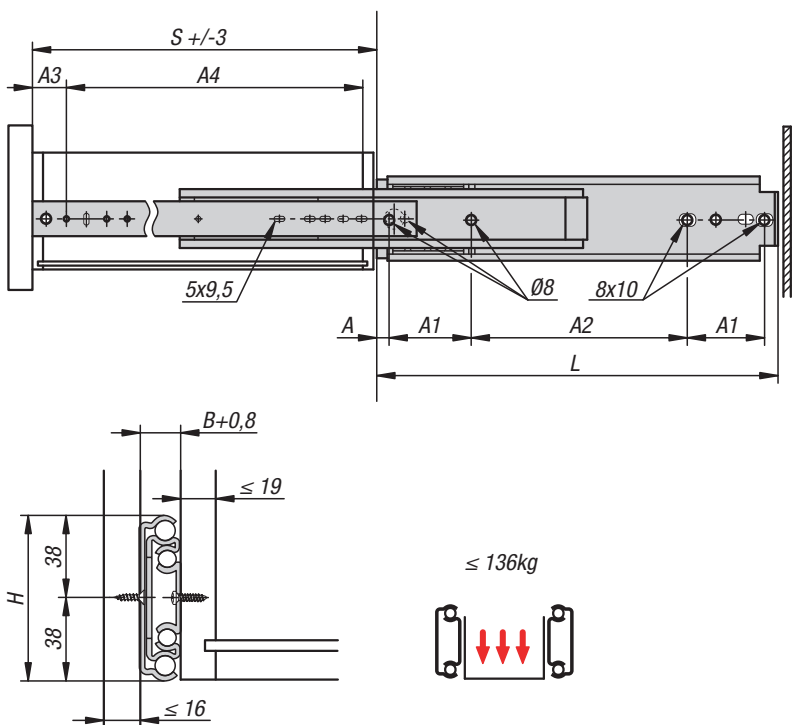

## Material:

Steel slides.  
Plastic ball cages.  
C-steel balls.

## Version:

Slides electro zinc-plated.  
Balls hardened.

## Sample order:

K1581.0360

## Note for ordering:

Supplied in pairs

## Note:

On telescopic slides with full extension, the travel is equal to the installed length, which ensures greater comfort and accessibility. Interlocking in closed position.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The specified load capacities refer to the maximum value for 60,000 cycles.

## Attention:

The load capacity of all telescopic slides is tested to DIN EN 15338 Level 3.



## KIPP Steel telescopic slides for side mounting, full extension, load capacity up to 136 kg

| Order No.  | A  | A1 | A2    | A3 | A4    | B  | H  | L   | Travel S | Loading per pair kg |
|------------|----|----|-------|----|-------|----|----|-----|----------|---------------------|
| K1581.0310 | 15 | 76 | 127   | 34 | 217,5 | 19 | 76 | 310 | 310      | 136                 |
| K1581.0360 | 15 | 76 | 178   | 34 | 268,5 | 19 | 76 | 360 | 360      | 136                 |
| K1581.0410 | 15 | 76 | 228,5 | 34 | 319,5 | 19 | 76 | 410 | 410      | 136                 |
| K1581.0460 | 15 | 76 | 279,5 | 34 | 370   | 19 | 76 | 460 | 460      | 136                 |
| K1581.0510 | 15 | 76 | 330   | 34 | 421   | 19 | 76 | 510 | 510      | 136                 |
| K1581.0560 | 15 | 76 | 381   | 34 | 471,5 | 19 | 76 | 560 | 560      | 136                 |
| K1581.0610 | 15 | 76 | 432   | 34 | 522,5 | 19 | 76 | 610 | 610      | 136                 |
| K1581.0660 | 15 | 76 | 482,5 | 34 | 573,5 | 19 | 76 | 660 | 660      | 136                 |
| K1581.0710 | 15 | 76 | 533,5 | 34 | 624   | 19 | 76 | 710 | 710      | 136                 |
| K1581.0760 | 15 | 76 | 584   | 34 | 675   | 19 | 76 | 760 | 760      | 136                 |
| K1581.0810 | 15 | 76 | 635   | 34 | 725   | 19 | 76 | 810 | 810      | 136                 |
| K1581.0860 | 15 | 76 | 686   | 34 | 776   | 19 | 76 | 860 | 860      | 136                 |
| K1581.0910 | 15 | 76 | 736   | 34 | 827   | 19 | 76 | 910 | 910      | 136                 |